FEEL THE PASSION

and a

1011111111

LIGHTING FOR CARS



M



HIGHLIGHTS, PRODUCT NEWS AND INSPIRATION





Strands Lighting Division is Europe's fastest-growing brand in the industry and offers the latest innovative vehicle lighting. **We live by the three words – feel the passion**. Our vision is to make you feel our passion, and we want you to experience it – regardless of whether you are in contact with our first-class customer service, open a package or mount a new innovative product.

We will give you a driving experience out of the ordinary – no matter your needs. We want you to work safely with total capacity regardless of environment or time of the day. We always work with our origin in the development process. With the harsh Scandinavian road conditions, extreme temperatures, salted roads, sudden temperature changes, and other challenges in mind.

We want to provide you with lighting that doesn't compromise in any area. With function, performance, and design in everything we do. Many years of experience and close cooperation with professionals make this possible. We want and dare to go first with a constant passion for changing the market, and we have already begun.



WE OFFER PEACE OF MIND

NAMES OF

STRANDS

BRESS

Except for design, quality, and performance, we give you safety. We offer a unique function warranty – from three to six years. This includes all products from Strands Lighting Division's range, which makes the warranty unique on the market. The warranty covers faults related to the manufacturing process, material, or assembly. With our function warranty, we want to improve the service, increase customer satisfaction, and emphasize our brand's quality. Ready to further strengthen our position on the market.

RANDS



THREE TO SIX YEARS



PAGE 8-29

nin ili

DRIVING LIGHTS

If you once experienced powerful driving lights with optimal visibility, you will never go back to basic. Strands Lighting Division develops and manufactures driving lights that help you relax and enjoy driving during the darkest hours. Design, performance, and quality surpass even the highest expectations. No matter which one of the driving lights you choose, you are guaranteed at least a three-years function warranty.



Use the QR code to check out the product.

MI,

١

l

17



www.strands.se www.strandseurope.com


ŝ

1 10


DRIVING LIGHTS

SKYLORD

- ✓ VIBRATION AND SHOCKPROOF
- ✓ SPECIAL COATING FOR HARSH CONDITIONS
- ✓ XPERIENCE MODE
- ✓ A MASTERPIECE OF DESIGN

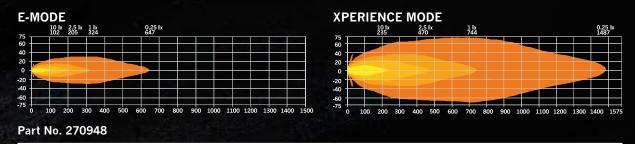

Voltage
Consumption, E-mode
Consumption, Xperience mode
Theoretical lumen
Actual lumen, E-mode
Actual lumen, Xperience mode
1 lux @ E-mode
1 lux @ Xperience mode
IP-class
Beam pattern
Position light



Connection Cable length Material housing Material lens Diameter Depth Height including bracket Operating temperature E-approved Ref EMC-certificate DT-4 500 mm Aluminium Polycarbonate 228 mm 80,65 mm 232,85 mm -30°C - +65°C ECE R149, R148 25 ECE R10, CISPR25 Class 3





6

1

Kiramita

SLD

3

ALL'

T

er.



14 | DRIVING LIGHTS

Use the QR code to check out the product.




á li

a

SIBERIA Skylord WHITE

✓ WHITE COLOR

- ✓ VIBRATION AND SHOCKPROOF
- ✓ SPECIAL COATING FOR HARSH CONDITIONS
- 🗸 XPERIENCE MODE




Part No. 270949

Voltage

Consumption, E-mode
Consumption, Xperience mode
Theoretical lumen
Actual lumen, E-mode
Actual lumen, Xperience mode
1 lux @ E-mode
1 lux @ Xperience mode
IP-class
Beam pattern
Position light
Color temperature

10-38V DC 21,5 W 124 W 11 000 1565 8860 329 m 751 m IP68, IP69K Combo Amber and white 5700K



Connection Cable length Material housing Material lens Diameter Depth Height including bracket Operating temperature E-approved Ref EMC-certificate DT-4 500 mmAluminium Polycarbonate 228 mm 80,65 mm 232,85 mm $-30^{\circ}C \sim +65^{\circ}C$ ECE R149, R148 25ECE R10, CISPR25 Class 3



LEGENDARY LIGHT BEAM
 DUAL POSITION LIGHT
 DURABLE MATERIAL CHOICES



0

-

-0

www.strands.se www.strandseurope.com .

STRANDS

12 - 50

Ce

DRIVING LIGHTS | 17

Voltage: 9-35 V DC, Consumption: 145 W, Theoretical lumen: 20 400, Actual lumen: 13 377, 1 Lux@: 465 m, IP-class: IP67/IP69K, Beam pattern: Combo, Position light: White and amber, Connection: D7-4, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Diameter: 228,6 mm, Depth: 86,7 mm, Height including bracket: 249,3 mm, Operating temperature: -30°C - +65°C, E-approved: ECE R112, R7, Ref: 30, EMC-certificate: ECE R10

Use the QR code to check out the product.



0000

Voltage: 9-35 V DC, Consumption: 145 W, Theoretical lumen: 14 280, Actual lumen: 10 485, 1 Lux@: 900 m, IP-class: IP67/IP69K, Beam pattern: Spot, Position light: White and amber, Connection: DT-4, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Diameter: 228,6 mm, Depth: 86,7 mm, Height including bracket: 249,3 mm, Operating temperature: -30°C - +65°C, E-approved: No, EMC-certificate: ECE R10

strands



✓ LEGENDARY LIGHT BEAM **DUAL POSITION LIGHT** ✓ DURABLE MATERIAL CHOICES

Part No. 809207 (Spot), 809187 SIBERIA NIGHT RANGER DRIVING LIGHT 7" LED


Voltage: 9-35 V DC, Consumption: 69 W, Theoretical lumen: 67 200, Actual lumen: 5130, 1 Lux@: 631 m, IP-class: IP67/IP69K, Beam pattern: Spot, Position light: White and amber, Connection: DT-4, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Diameter: 178 mm, Depth: 78,2 mm, Height including bracket: 194,7 mm, Operating temperature: -30°C -+65°C, E-approved: No, EMC-certificate: ECE R10



www.strands.se www.strandseurope.com

9.35 V DC, Consumption: 70 W, Theoretical lumen: 9600, Actual 467, 1 Lux@: 369 m, IP-class: IP67/IP69K, Beam pattern: Combo, light: White and amber, Connection: DT-4, Cable length: 500 mm, housing: Aluminium: Material lens: Polycarbonate, Diameter: 178 mm, 8,2 mm, Height including bracket: 194,7 mm, Operating temperature: 65°C, E-approved: ECE-R112, R7, Ref: 20, EMC-certificate: ECE R10 Voltage lumen Positic Materi Depth: -30°C



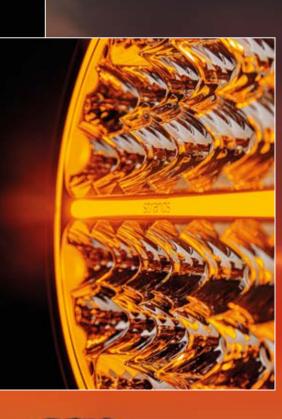





SIBBRARGER







SIBERARGER BUSHRANGER

Part No. 809190 (9"), 809189 (7") SIBERIA BUSH RANGER DRIVING LIGHT LED

-

Voltage: 9-35 V DC, Consumption: 145 W, Theoretical lumen: 20 400, Actual lumen: 11 515, 1 Lux@: 387 m, IP-class: IP67/IP69K, Beam pattern: Combo, Position light: White and amber, Connection: DT-4, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Diameter: 228,6 mm, Depth: 86,7 mm, Height including bracket: 249,3 mm, Operating temperature: -30°C + +55°C, E-approved: No, EMC-certificate: ECE R10





Voltage: 9-35 V DC, Consumption: 70 W, Theoretical lumen: 9600, Actual lumen: 3584, 1 Lux@: 346 m, IP-class: IP67/IP69K, Beam pattern: Combo, Position light: White and amber, Connection: DT-4, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Diameter: 178 mm, Depth: 78,2 mm, Height including bracket: 194,7 mm, Operating temperature: -30°C + 65°C, E-approved: No, EMC-certificate: ECE R10





- ✓ DRIVING LIGHT WITH A WARNING LIGHT FUNCTION
- ✓ NO COMPROMISES MAXIMUM PERFORMANCE
- 🗸 A HALO OF LIGHT
- ✓ INVISIBLE DESIGN

FIREFLY PROFESSIONAL WHITE DRIVING LIGHT 9'' LED

Voltage Consumption Theoretical lumen Actual lumen 1 lux@ Kelvin IP-class Connection Cable length 10-48V DC 145W 16 800 12 076 470 m 6000K IP67 DT-4 1000 mm Material housing Material lens Diameter Depth Height including bracket Operating temperature E-approved Ref EMC-certificate Aluminium Polycarbonate 220 mm 85 mm 239 mm -40°C - +65°C R149, R148 50 ECE R10



www.strands.se www.strandseuro



DRIVING LIGHTS

NO COMPROMISES – MAXIMUM PERFORMANCE

✓ A HALO OF LIGHT

✓ INVISIBLE DESIGN

Part No.270955 FIREFLY DRIVING LIGHT 9'' LED

Voltage Consumption Theoretical lumen Actual lumen 1 lux@ Kelvin IP-class Connection Cable length 10-48V DC 145W 16 800 12 076 470 m 6000K IP67 DT-4 1000 mm

Material housing Material lens Diameter Depth Height including bracket Operating temperature E-approved Ref EMC-certificate Aluminium Polycarbonate 220 mm 85 mm 239 mm -40°C - +65°C R149, R148 50 ECE R10

•



GUIDE YOU FORWARD

Be prepared for Firefly. A revolutionary driving light that stands out by blending in with your vehicle. A result of cutting-edge engineering and our attention to detail. With its invisible design and maximum performance, will Firefly guide you forward.

Use the QR code to check out the product.



BALANCED LIGHT BEAM

4

A light beam with an intensity far higher than standard. Supported by TIR optics, especially designed to cover a wide area without wasting any long-distance illumination.

UNIQUE POSITION LIGHT

Enjoy the smooth startup effect when the light slowly increases its intensity before reaching full capacity. Comes with a dual function. Choose between amber and white.

DARK KNIGHT LOOK

A futuristic, minimalistic all-black look helps your vehicle reach perfection from all angles. Play it confident and stylish both day and night.



Part No. 270927 DARK KNIGHT INTENSE 9'' DRIVING LIGHT LED

strands

1 4

Use the QR code to check out the product.



Voltage: 9-36 V DC, Consumption: 125 W, Theoretical lumen: 14 000, Actual lumen: 11 000, IP-class: IP68/IP69K, Beam pattern: Combo, Position light: White and amber, Connection: DT-4, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Diameter: 218 mm, Depth: 70 mm, Height including bracket: 233,5 mm, Operating temperature: -40°C - +60°C, E-approved: ECE R7, R112, Ref: 45, EMC-certificate: ECE R10





UNBREAKABLE LENS
 A DARKER LOOK
 MINIMAL VIBRATIONS



YUKON 2.0 DRIVING LIGHTS LED

PART NO.	270940 YUKON 7" LED	270941 YUKON 9" LED	270942 YUKON SPOT 9" LED
VOLTAGE	9-32V DC	9-32V DC	9-32V DC
CONSUMPTION	84 W	86 W	113 W
THEORETICAL LUMEN	9500	11 000	11 500
ACTUAL LUMEN	8000	9500	10 000
KELVIN	5000	5000	5000
1 LUX @	423 m	463 m	1000 m
IP-CLASS	IP68/IP69K	IP68/IP69K	IP68/IP69K
BEAM PATTERN	Flood	Flood	Spot
POSITION LIGHT	No	No	No
CONNECTION	DT-2	DT-2	DT-2
CABLE LENGTH	150 mm	150 mm	150 mm
MATERIAL HOUSING	Aluminium	Aluminium	Aluminium
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate
DIAMETER	178 mm	229 mm	229 mm
DEPTH	69 mm	97,5/105,5 mm	97,5/105,5 mm
HEIGHT INCLUDING BRACKET	196 mm	249,5 mm	249,5 mm
OPERATING TEMPERATURE	-35°C - +45°C	-35°C - +45°C	-35°C - +45°C
E-APPROVED	ECE R149	ECE R149	No
REF	40	50	-
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10



DRIVING LIGHTS



Use the QR code to check out the products.





PAGE 30-57

LED BARS

A row of light with lots of possibilities. LED bars are ideal for enhancing your safety and the appearance of your vehicle. Mount it on the roof, under or above the license plate, or behind the grill. The modern and discreet design is outstanding for the overall impression. Especially when the lights are on. Choose between curved or straight shapes. The linear alignment spreads the light over a wide area, providing effective visibility over significant distances.



✓ UP TO 22 900 ACTUAL LUMEN ✓ 5000K

- ✓ E-APPROVED



Part No. 809161 SIBERIA OUTLAW UDX LED BAR 8"

Voltage: 10-32V DC, Consumption E-mode: 32W, Xperience mode: 66W, Theoretical lumen: 7167, Actual lumen E-mode: 2788, Xperience mode: 5758, 1 lux E-mode: 327 m, 1 lux Xperience mode: 464 m, IP-class: IP67/IP69K, Beam pattern: Combo, Position light: White and amber, Connection: DT-4, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 205 mm, Depth: 71,6 mm, Height: 76 mm, Height including bracket: 89 mm, Operating temperature: -30°C - +65°C, E-approved E-mode: ECE R148, R149, Ref: E-mode 25, EMC-certificate: ECE R10

*Experience mode for offroad use only.



SIBERIA OUTLAW UDX

Par Na Wat BIERIA OUTLAW UDX LED BAR 22"

Voltage: 10-32V DC, Consumption E-mode: 102W, Xperience mode: 215W, Theoretical lumen: 48 000, Actual lumen E-mode: 10 889, Xperience mode: 22 900, 1 lux @ E-mode: 312 m, 1 lux @ Xperience mode: 470 m, IP-class: IP67/IP69K, Beam pattern: Combo, Position light: White and amber, Connection: Cable, Cable length: 1500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 562mm, Depth: 71,6 mm, Height: 76 mm, Height including bracket: 89 mm, Operating temperature: -30°C - +65°C, E-approved E-mode: ECE R148, R149, Ref: E-mode 25, EMC-certificate: ECE R10







SIBERIA OUTLAWA

AN INVESTMENT IN SAFETY

The beam pattern is optimized and gives you one good width and an unsurpassed light length. See potential danger much earlier to get extra time to react. Ready to hit the darkness.

Part No. 809167 SIBERIA OUTLAW LED BAR 22''

Voltage: 10-30V DC, Consumption: 270W, Theoretical lumen: 29 600, Actual lumen: 13 007, 1 lux @: 1220 m, IP-class: IP67/IP69, Beam pattern: Spot, Position light: White and amber, Connection: Cable, Cable length: 1500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 562 mm, Depth: 71,5 mm, Height: 76 mm, Height including bracket: 89 mm, Operating temperature: -30°C - +65°C, E-approved: No, EMC-certificate: ECE R10



THE WORLD'S STRONGEST LED BAR

Redefining the light output and creating a wall of light with 1 lux at 1220 meters or 1466 meters. Designed to be the center of attention.

YELLOW LOGOTYPE

Siberia Outlaw comes in a yellow Strands logotype to differ further from other LED bars.

UNIQUE COMPONENTS

Loaded with world-class technology, knowledge, and development. Shaped by the best reflector design, diodes, and circuit boards.

Part No. 809168 SIBERIA OUTLAW LED BAR 32"

Voltage: 10-30V DC, Consumption: 409W, Theoretical lumen: 44 400, Actual lumen: 14 270, 1 lux @: 1466 m, IP-class: IP67/IP69, Beam pattern: Spot, Position light: White and amber, Connection: Cable, Cable length: 2500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 817 mm, Depth: 71,5 mm, Height: 76 mm, Height including bracket: 89 mm, Operating temperature: -30°C - +65°C, E-approved: No, EMC-certificate: ECE R10







SIBERIA SR LED BAR

PART NO.	809170	809171	809172	809173	809174
VOLTAGE	10-40V DC				
CONSUMPTION	32W	59W	95W	130W	155W
THEORETICAL LUMEN	4000	8000	12000	16000	19200
ACTUAL LUMEN	2200	4254	5641	7434	8570
1 LUX @	368m	447m	444m	464m	443m
IP-CLASS	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K
BEAM PATTERN	Spot	Combo	Combo	Combo	Combo
POSITION LIGHT	Amber and white				
CONNECTION	DT-4	DT-4	DT-4	Cable	Cable
CABLE LENGTH	500mm	500mm	500mm	2500mm	2500mm
MATERIAL HOUSING	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
LENGTH	300,6mm	555,6mm	813,6mm	1065,6mm	1269,6mm
DEPTH	55,5mm	55,5mm	55,5mm	55,5mm	55,5mm
HEIGHT	45mm	45mm	45mm	45mm	45mm
HEIGHT INCLUDING BRACKET	65mm	65mm	65mm	65mm	65mm
OPERATING TEMPERATURE	·30°C · +65°C	-30°C - +65°C	-30°C - +65°C	-30°C - +65°C	-30°C - +65°C
E-APPROVED	ECE R112, R7				
REF	30	50	50	50	50
EMC-CERTIFICATE	ECE R10				



SIBERIA DR LED BAR

PART NO.	809179	809180	809181	809182	809183	809184
VOLTAGE	10-40V DC					
CONSUMPTION	28W	45W	91W	143W	196W	239W
THEORETICAL LUMEN	4800	8000	16000	24000	32000	38400
ACTUAL LUMEN	2002	3294	6316	8792	10823	11280
1 LUX @	447m	437m	450m	446m	450m	464m
IP-CLASS	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K
BEAM PATTERN	Spot	Combo	Combo	Combo	Combo	Combo
POSITION LIGHT	Amber and white					
CONNECTION	DT-4	DT-4	DT-4	Cable	Cable	Cable
CABLE LENGTH	500mm	500mm	500mm	2500mm	2500mm	2500mm
MATERIAL HOUSING	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
LENGTH	205mm	307mm	562mm	817mm	1072mm	1276mm
DEPTH	71,6mm	71,6mm	71,6mm	71,6mm	71,6mm	71,6mm
HEIGHT	76mm	76mm	76mm	76mm	76mm	76mm
HEIGHT INCLUDING BRACKET	89mm	89mm	89mm	89mm	89mm	89mm
OPERATING TEMPERATURE	-30°C - +65°C	·30°C · +65°C	-30°C - +65°C	-30°C - +65°C	-30°C - +65°C	-30°C - +65°C
E-APPROVED	ECE R112, R7	ECE R112				
REF	45	45	45	50	50	50
EMC-CERTIFICATE	ECE R10					

NE ARA

www.strands.se www.strandseurope.com LED BARS



HIGHEST POSSIBLE PERFORMANCE
 OPTIMIZED LIGHT BEAM
 DUAL POSITION LIGHT



Part No. 809170-809174 SIBERIA SR LED BAR






STRANDS



- ✓ HIGHEST POSSIBLE PERFORMANCE
- ✓ CURVED DESIGN
- ✓ OPTIMIZED LIGHT BEAM
- ✓ DUAL POSITION LIGHT

Part No. 809196-809199 SIBERIA DRC LED BAR







LED BARS

SIBERIA CURVED

Use the QR code to check out the products.



HUNCTICA TEARS

Part No. 809192-809195

SIBERIA SRC LED BAR

www.strands.se www.strandseurope.com LED BARS | 45

DUAL POSITION LIGHT

A dual position light. Express your style and personality by choosing between the colors amber and white.



Part No. 809178 SIBERIA DRH LED BAR 22''

Voltage: 9-40 V DC, Consumption: 91 W high beam, high beam, 123 W high beam + heating lens, Theoretical lumen: 16 000, Actual lumen: 6316, 1 lux @ 450 m, IP-class: *IP67/IP69K*, Beam pattern: *Combo*, Position light: White and amber, Heated lens: Automatic heated lens start at 5°C, Connection: DT-4, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 562 mm, Depth: 71,6 mm, Height: 76 mm, Height including bracket: 89 mm, Operating temperature: -30°C - +65°C, E-approved: ECE R7, R112, EMC-certificate: ECE R10







AUTOMATIC HEATING LENS

A double-row LED bar with a built-in heating lens. The feature is automatic, starts at 5°C, and keeps snow and ice away from the lens - without any handling by the driver.



Use the QR code to check out the product.



www.strands.se www.strandseurope.com

24-1



SIBERIA OUBE



www.strands.se www.strandseurope.com

OPTIMIZED LIGHT

The light beam combines width and length – an optimized solution to fit the compact construction. Unbeatable for quickly discovering animals coming from the roadside.

COMPACT SIZE

Discreet and neat, perfect for use where larger lighting doesn't fit. A really powerful lamp that performs 2949 actual lumens and 1 lux at 166 meters. Mount it alone, in pairs or combine several.



Express your style. The dual position light allows you to choose between white and amber position color.

strands

Part No. 809186 SIBERIA QUBE WORK LIGHT LED

strands

Use the QR code to check out the product.



Voltage: 9-35 V DC, Consumption: 37 W, Theoretical lumen: 4800, Actual lumen: 2949, IP-class: IP67/IP69K, Beam pattern: Combo, Position light Position light: White and amber, Connection: DT-4, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 72 mm, Depth: 72 mm, Height: 72 mm, Height including bracket: 81,5 mm, Operating temperature: -30°C - +65°C, EMC-certificate: ECE R10




WORK LIGHT AND WARNING LIGHT

strands

This is the next generation of multifunctional side shooters. The ultra-wide, long-distance beam and the extremely effective warning light – packed into one compact lamp. The all-in-one solution simplifies installation, eliminates to mount several different lamps while get it look smoother from all angles.

COMBO BEAM

Red Fox make sure no unexpected dangers will sneak up on you. The ultra-wide, long-distance beam produces a light pattern of 160° beam angle.

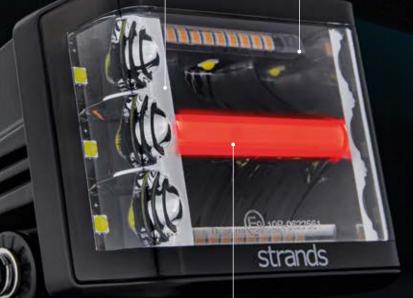

DUAL POSITION LIGHT

Personalize your look with the position light color you prefer. Either you go for the most beautiful of sunsets with the amber color – or be the fire and dare to choose the red one.



LED BARS | 51

Part No. 809125 SIBERIA RED FOX WORK-/WARNING LIGHT LED

spuens

Voltage: 9-32 V DC, Consumption: 41 W, Theoretical lumen: 8400, Actual lumen: 3583, 1 lux @: 160 m, IP-class: IP67/IP69K, Beam pattern: Flood, Position light: Red and amber, Connection: DT-6, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 92,93 mm, Depth: 74,57 mm, Height: 74,1 mm, Height including bracket: 87,56 mm, Operating temperature: -30°C - +65°C, EMC-certificate: ECE R10

SBERIA







Part No. 809131, 809132, 809133 DARK KNIGHT NUUK

Use the QR code to check out the products.





DARK KNIGHT NUULIO



STRANDS

LED BARS | 53

LED BAR



 COVER ALL NEEDS
 DUAL POSITION LIGHT
 WARNING LIGHT WITH DRIVING LIGHT FUNCTION



Use the QR code to check out the products.



Part No. 809212, 809213, 809214 SIBERIA NIGHT GUARD



www.strands.se www.strandseurope.com

SIBERIA NGHT GUARD

COVER ALL NEEDS

Night Guard comes in five sizes to cover all needs. 12", 20", 22", 32" and 38". Easy to mount and fit both trucks and vehicles.

STRANDS

WARNING LIGHT WITH DRIVING LIGHT FUNCTION

Siberia Night Guard provides both a powerful warning light and a driving light function that delivers an optimized, massive light beam that combines length and width.

DUAL POSITION LIGHT

Let the characteristic Siberia position light suit your personal style. Choose between amber or white light.



DARK KNIGHT IDENTITY

- 🗸 WIDE AND LONG BEAM PATTERN
- 🗸 DARK EXCLUSIVITY
- UNIQUE POSITION LIGHT
- SEVERAL POSSIBILITIES FOR EASY INSTALLATION

Use the QR code to check out the product.



Part No. 809165 DARK KNIGHT IDENTITY LED BAR 20''

Voltage: 9-36 V DC, Consumption: 98 W, Theoretical lumen: 12 000, Actual lumen: 9800, 1 lux @ 458 m, IP-class: IP68/IP69K, Beam pattern: Combo, Position light: White and amber, Connection: DT-4, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 520 mm, Depth: 55,5 mm, Height: 58 mm, Height including bracket: 75 mm, Operating temperature: -40°C - +60°C, E-approved: ECE R7, R112, EMC-certificate: ECE R10

STRA

FEEL THE PASSION Strands

S




ED BARS



PAGE 58-69

MOUNTING ACCESSORIES

All mounting accessories come with the same goal – to facilitate your installation. Whether you need mounting accessories for cars, trucks, or other vehicles, offer Strands Lighting Division the best solution for you and your vehicle.

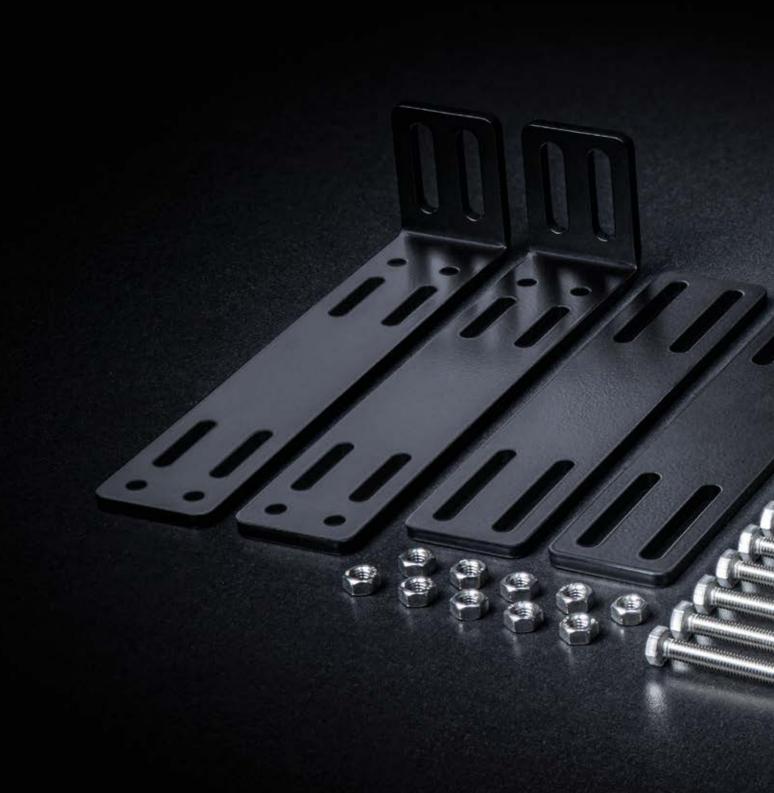

Part No. 270360 SIBERIA UNIVERSAL BRACKET FOR CRASH BAR

60 | MOUNTING ACCESSORIES

The kit includes: Left bracket, right bracket, 8x bolts M6x80 mm, 8x bolts M6x120 mm, washers, split lock washers, nuts, manual.



MOUNTING

SIBERIA CRASH BAR BRACKET

Use the QR code to check out the product.




ALER ANTI

www.strands.se www.strandseurope.com



Part No. 270352-270353 DRIVING LIGHT BRACKET

For a LED bar or three driving lights I 545x90 mm I CC: 250 mm Black (270352) I Stainless Steel (270353)



Part No. 270356-270357 DRIVING LIGHT BRACKET

For 9" driving lights I 800x90 mm I CC: 250 mm Black (270356) I Stainless Steel (270357)



Part No. 270354-270355 DRIVING LIGHT BRACKET For 7" driving lights I 635x90 mm I CC: 195 mm Black (270354) 1 Stainless Steel (270355)



Part No. 270400 LED BAR BRACKET 2 brackets | Fits SLD Part No. 809114 | 522x130mm | CC: 515mm




Part No. 270350-270351 BRACKET FOR DRIVING LIGHTS

For two driving lights I 452x87 mm I CC: 418 mm I Black (270350) I Stainless Steel (270351)




MOUNTING



Part No. 270476 SIBERIA PROFESSIONAL UNIVERSAL BRACKET KIT The kit includes: Left bracket, right bracket, screws, manual.



Part No. 270401 DRIVING LIGHT BRACKET 2 brackets | 450 x 87 mm | CC: 415 mm



Part No. 270360 SIBERIA UNIVERSAL BRACKET FOR CRASH BAR

The kit includes: Left bracket, right bracket, 8x bolts M6x80 mm, 8x bolts M6x120 mm, washers, split lock washers, nuts, manual.



Part No. 270422 TOP BRACE Flat model | 1 pair | 145-235mm



Part No. 809185 SIBERIA DR BAR BRACKET Suitable for Siberia DR 809180-809184 and 58-70 mm bars.





Part No. 270486 (3m), 270487 (5m) DT-4-CABLE, VDE-CABLE ADR-Cable, DT4, 4x1,5mm2, max 156W



Part No. 270417 CANBUS INTERFACE Canbus smart grensesnittadapter med signalutgang for fjernlys. Den leser canbus fjernlyskontroll og dekker signalet til analog + 12V



Part No. 270415 CABLE KIT 12V

12V DC, 30A relay, with loose cable ends, for two lights. Max $2x\;180W$



Part No. 270438 CABLE WITH DT-4 FEMALE/ PLUG TO DT-2 MALE/PIN



Part No. 270480 (0,5m), 270482 (5m) DT-2-CABLE, VDE-CABLE ADR-cable, DT, 2x1,5mm2, max 156W



Part No. 270440 CABLE KIT 12V-24V

12:24V DC, 30A fuse, 40A relay, 1 pcs DT-2 connector female/plug. Max 1x 145W with DT, Max 360W if the DT is cutted. With on/off switch



MOUNTING



Part No. 270442 DT-CABLE SPLIT DT 1+2 | one male/pin, two females/plugs | 12-24V



Part No. 270425 XBB OBD2 KIT XBB DONGLE® & XBB POWERUNIT®



Part No. 270490 CRUISE LIGHT STROBE CONTROLLER

Input: 10-35V DC, Output: 10-35V DC, 6 output channels, max 6 x 30W, 12 flash patterns, IP68, 45 cm output cable, 50 cm input cable, 4 screws included



Part No. 270479 SIBERIA HIGH POWER PROFESSIONAL WIRING KIT 3X DT-CONNECTORS

Use the QR code to check out the product.



12V DC, 50A fuse, 70A relay, 3 pcs DT-4/DT-2 connectors females/plugs. Max 3x 145W with DT, max 550W if the DT is cutted. The kit includes: Wiring kit, 2x blue duraseal, cable clamp, 3x DT-converter DT4 to DT2, manual.



Marine State

SIBERIA HIGH POWER

Part No. 270477 SIBERIA PROFESSIONAL WIRING KIT 1X DT-CONNECTOR

12V DC, 30A fuse, 40A relay, 1 pcs DT-4/DT-2 connector female/plug. Max 145W with DT, max 360W if the DT is cutted. *The kit includes: Wiring kit,* 2x blue duraseal, cable clamp, 1x DT-converter DT4 to DT2, manual. Part No. 270478 SIBERIA PROFESSIONAL WIRING KIT 3X DT-CONNECTORS

12V DC, 40A fuse, 60A relay, 3 pcs DT-4/DT-2 connectors females/plugs. Max 4x 145W with DT, max 420W if the DT is cutted. The kit includes: Wiring kit, 2x blue duraseal, cable clamp, 3x DT-converter DT4 to DT2, manual.





The brackets are very flexible, and the mounting possibilities of your LED bar are almost endless.

FIT ALL LED BARS

strands

You can choose exactly what distance you want to mount the two brackets at, which means the brackets fit all LED bars in Strands Lighting Division's range.

SCREWS INCLUDED

The brackets comes in pairs, both right and left, delivered with 8 screws and a manual.

Part No. 270476 SIBERIA PROFESSIONAL UNIVERSAL BRACKET KIT

The kit includes: Left bracket, right bracket, screws, manual.



UNIVERSAL BRACKET

The Siberia brackets fits all LED bars from Strands Lighting Division's range and give you a perfect installation every time. The brackets are sold in pairs.



Use the QR code to check out the product.





www.strands.se www.strandseurope.com

ALL STREET, ST

PAGE 70-83

WARNING LIGHTS

Be seen and be safe. Warning lights play an essential role for both you and your surroundings. Strands Lighting Division covers a wide range of unique top-quality models for everyday life. Advanced features in combination with modern design. Everything from extremely slim and powerful warning light bars to highly effective small and compact options.

FIREFLY SUMMERGLOW





Use the QR code to check out the products.



www.strands.se www.strandseurope.com

GHTS

PART NO.	850961	850962	850964	850965
VOLTAGE	10-48V DC	10-48V DC	10-48V DC	10-48V DC
CONSUMPTION	36 W	36 W	47 W	47 W
P-CLASS	IP67	IP67	IP67	IP67
PATTERNS	3	3	5	5
CONNECTION	DIN	Cig plug	DIN	Cig plug
CABLE LENGTH	-	2500 mm	-	2500 mm
COLOR LENS	Clear	Clear	Clear	Clear
OLOR LED	Amber	Amber	Amber	Amber
IEIGHT	111 mm	42 mm	112 mm	41 mm
CC 00		-	-	-
DIAMETER	110 mm	110 mm	140 mm	140 mm
ADR-APPROVED	No	No	No	No
E-APPROVED	ECE R65	ECE R65	ECE R65 Class 2	ECE R65 Class 2
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10





BLACK FRAME Part No. 850396, 850397, 850398 Part No. 850396, 850397, 850397 Part No. 850396 Part No. 850409 Part No. 850409


The click-on frame provides a seamless montage and gives your vehicle a slim, dark look with hidden screws. Easy to attach after the mounting. Ready to prevent stone chips and corrosion. Choose between black and chrome frames. Both are included. You can also paint the black frame the same color as your vehicle to create a customized impression.

CHROME FRAME Part No. 850399



ENDLESS MOUNTING POSSIBILITIES

The tail light series delivers horizontal and vertical mounting opportunities. The unique, slim design and the multivolt make it perfect for vehicles like ATVs, trailers, trucks, and construction machinery.



1.1	e	
εĽ	Eq]	
2.7	- 5	
tμ	1 a i	- H
- 1 F		
tи лир II		

DARK KN	IGHT STROE	Use the QR code to check out the products.			
PART NO.	850400	850401	850402	850403	850404
VOLTAGE	12-24 V DC	12-24 V DC	12-24 V DC	12-24 V DC	12-24 V DC
CONSUMPTION	7 W	10 W	10 W	10 W	10 W
PATTERNS	21	21	21	21	21
IP-CLASS	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K
COLOR LENS	Clear	Clear	Dark tinted	Clear	Dark tinted
COLOR LED	Amber	Amber	Amber	Amber	Amber
CONNECTION	Cable	Cable	Cable	Cable	Cable
CABLE LENGTH	400 mm	400 mm	400 mm	400 mm	400 mm
LENGTH	79,2 mm	95,2 mm	95,2 mm	129,2 mm	129,2 mm
DEPTH	31,2 mm	31,2 mm	31,2 mm	33,2 mm	33,2 mm
HEIGHT	14,8 mm	14,8 mm	14,8 mm	14,8 mm	14,8 mm
сс	68 mm	84 mm	84 mm	118 mm	118 mm
E-APPROVED	ECE R65 Class 1	ECE R65 Class 2	ECE R65 Class 1	ECE R65 Class 2	ECE R65 Class 1
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10



WARNING LIGHT AND TRIPLE POSITION LIGHT

A new type of LED bar with four functions in one product: warning light and triple position light. Choose between white, amber, or red color.

Part No. 809250 (10"), 809252 (30") SIBERIA LOW RIDER WARNING LIGHT/POSITION LIGHT

Voltage: 10-32V DC, Consumption: 20W (10"), 27W (30"), Functions: Warning light, triple position light, IP-Class: IP67/IP69K, Patterns: 4, Position light: White, red and amber, Connection: Cable, Cable length: 2500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 275 mm (10") 766 mm (30"), Depth: 50,4 mm, Height: 30,9 mm, Height including bracket: 42,9 mm, Operating temperature: -30°C - +65°C, E-approved: ECE R148, EMC-certificate: ECE R10



WARNING LIGHTS


\mathbb{R} \mathbb{D} \mathbb{E} \mathbb{R}

SUPER-SLIM DESIGN

The height of only 3 cm and the depth of 5 cm will make it by far the slimmest LED bar in the product range. Perfect for trucks and other vehicles.

E-APPROVED AND THREE-YEARS FUNCTION WARRANTY

All four functions are entirely E-approved and come with Strands Lighting Division's unique three-years function warranty.











MOUNTING ON BARS

Mount the 6 LED version on side bars, side steps, light bars, or roof bars with rubber gasket part no. 850206.





EXTREMELY SLIM

Invisible edges for a perfect look. Design and function in one product.

Part No. 850201HP-A (3 LED), 850202HP-A (4 LED), 850203HP-A (6 LED) CRUISE LIGHT STROBE LIGHT LED

Voltage: 9-30V DC, Consumption: 3W (3 LED), 5W (4 LED) 7W (6 LED), Patterns: 26, IP-Class: IP67, Color lens: Clear, Color LED: Amber, Connection: Cable, Cable length: 400 mm, Length: 82 mm (3 LED) 98 mm (4 LED), 131 mm (6 LED), Depth: 6,6 mm, Height: 31 mm, CC: 67,9 mm (3 LED), 83,9 mm (4 LED), 118 mm (6 LED), E-approved: ECE R65, EMC-certificate: ECE R10



CRUISE LIGHT LED

THREE SIZES

Availible in three sizes, 3, 4 or 6 LED. Combine them and make your vehicle visible from all angles.





E-APPROVED

Fully E-approved according to ECE R65 to make you safe on the road.



Use the QR code to check out the products.



MONITUM

E-APPROVED

-

The entire series is fully E-approved according to ECE R65 class 2, which means the warning light bar can be switched from day to night mode.

EXTREMELY SLIM

THE OWNER WHEN THE PARTY NAMES

COLUMN TWO IS NOT

Unlike traditional alternatives on the market, Monitum comes with a height of only 33,5 mm, which will give you less wind noise and reduce fuel consumption.

POSITION LIGHT

Comes with eleven different warning light patterns. The Cruise Light feature – the position light – provides an appealing styling effect and increases your visibility on the roads.

strands

Part No. 850140 MONITUM WARNING LIGHT LED

Use the QR code to check out the product.



Voltage: 12-24V DC, Consumption: 84 W, Patterns: 11, IP-Class: IP67, Color lens: Clear, Color LED: Amber, PCS of LEDS: 120, Cable length. 4000 mm, Length: 474 mm, Width: 199,8 mm, Height: 33,5 mm, Height including feets: 74,5 mm, E-approved: ECE R65 Class 2, EMC-Certificate: ECE R10



CRUISE LIGHT ROOF BAR

Part No. 850209 CRUISE LIGHT CONTROL UNIT



SLIM DESIGN

The series comes in a super slim design and a height of only 36 mm and a width of 120 mm. Made to fit all types of commercial vehicles.

CRUISE LIGHT EFFECT

Increase your visibility and get an appealing styling effect with 13 different warning light patterns where Cruise Light is one of them.

Part No. 850211 CRUISE LIGHT ROOF BAR WARNING LIGHT LED



Voltage: 10-30V DC, Consumption: 80 W, Patterns: 13, IP-Class: IP67, Color lens: Clear, Color LED: Amber, Cable length: 2500 mm, Length: 314,8 mm, Width: 120 mm, Height: 36 mm, Height including brackets: 66 mm, E-approved: ECE R65 Class 2, EMC-Certificate: ECE R10





Part No. 809096 SLIM WARNING LIGHT LED MAGNET/CIG PLUG

Voltage: 9-30V, Consumption: 10 W, Patterns: 7, IP-Class: IP67, Color lens: Clear, Color LED: Amber, Height: 46 mm, Diameter: 112 mm, CC: 90mm, E-approved: ECE R65, EMC-Certificate: ECE R10



Part No. 850932 AMBER WARNING LIGHT LED MAGNET/CIG PLUG

Voltage: 12-48V, Consumption: 40 W, Patterns: 11, IP-Class: IP67, Color lens: Amber, Color LED: Amber, Cable length: 500 mm, Height: 54 mm, Diameter: 110 mm, CC: 87,5 mm, E-approved: ECE R65, EMC-Certificate: ECE R10





Voltage: 12-24V DC or 220V AC, Consumption: 14,5 W, Patterns: 3, IP-Class: IP65, Color lens: Amber, Color LED: Amber, Cable length: 4000 mm, Height: 140 mm, Diameter: 128 mm, E-approved: ECE R65, EMC-Certificate: ECE R10



ON/OFF

PAGE 84-95

WORK LIGHTS

Work with precision and total capacity, even when it's dark. Our work lights meets the high expectations of professional drivers – both when it comes to quality and light output. Are you also looking for innovative design and the latest features? Our range contains it all. All work lights are covered by a function warranty, with up to six years of validity.



Part No. 809248 DK HARDCORE WORK LIGHT LED

Voltage Consumption Theoretical lumen Actual lumen Kelvin IP-class Connection

Cable length Material housing 9-36V DC 32W 4560 3645 5000K IP68/IP69K Built in DT-2 with included DT-2 cable 330 mm Aluminium

Material lens Material bracket Length Depth Height Height including bracket Operating temperature ADR-approved E-approved EMC-certificate

Polycarbonate Satinless steel with lock nut 92,1 mm 37,2 / 43,2 mm 92,1 mm 110,5/124,5 mm -30°C - +65°C No No CISPR25 Class 3











www.strands.se www.strandseurope.com WORK LIGHTS | 87

DARK KNIGHT FORRIEX



Use the QR code to check out the product.

strands



WORK LIGHTS

REVOLUTIONIZE YOUR WORKSPACE

Revolutionize your workspace like never before. Dark Knight Fortex is your powerful lighting solution. The work light you have always dreamed of. Ready to release your dark side with style and unique features.



✓ A WIDE, SMOOTH, AND POWERFUL BEAM PATTERN

✓ REMARKABLE RED POSITION LIGHT


✓ ADJUST THE COLOR TEMPERATURE TO YOUR SPECIFIC NEED



Part No. 809255

Voltage Consumption Theoretical lumen Actual lumen 1 lux @ IP-class Beam pattern Color temperature Position light Connection 9-36V DC 39W 3900 2500 lm / 3200 lm / 2740 lm 42/45/51 IP68/IP69K Flood 4000K / 5000K / 6000K Red DT-4 Cable length Material housing Material lens Length Depth Height Height including bracket Operating temperature E-approved EMC-certificate 500 mm Aluminium Polycarbonate 85 mm 64,4 mm 80 mm 90 mm -40°C - +60°C No ECE R10





Voltage: 9-32V DC, Consumption: 31,5 W, Theoretical lumen: 4800, Actual lumen: 3465, 1 lux @: 47 m IP-Class: IP67/IP69K, Beam pattern: Flood, Color temperature: 5700K, Position light: White, amber and red, Connection: Cable, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 167 mm, Depth: 54,2 mm, Height: 76 mm, Height including bracket: 96,6 mm, Operating temperature: -30°C - 65°C, EMC-Certificate: ECE R10, CISPR 23 Class 3







SIBERIA NEXTLEVEL





COMPACT DESIGN

The compact design offers a variety of mounting possibilities in small spaces and positions around the vehicle and hidden for a cleaner overall impression.

THE RIGHT VIEW

Unlike traditional lamps, Siberia RV gives you more than just a wide light spread. The reflectors provide the perfect combination of length and width, the right kind of view, which increases the opportunities and numbers of suitable applications and situations. At the handlebars of a quad, on the stairs of a truck or as a reverse light – you decide.





Part No. 809124 SIBERIA RV WORK LIGHT LED

Voltage: 10-30 V DC, Consumption: 15 W, Theoretical lumen: 1960, Actual lumen: 1862, IP-class: IP68, Connection: DT-2, Cable length: 300 mm, Material housing: Aluminium, Material lens: Polycarbonate, Lenght: 144 mm, Depth: 74,5 mm, Height including bracket: 91,7 mm, Operating temperature: -40°C - +60°C, E-approved: ECE R23, EMC-certificate: ECE R10, CISPR25 Class 5



SIBERIA RIGHT VIEW

Use the QR code to check out the product.









- ✓ SEVEN MODELS
- ✓ INFINTY DESIGN
- ✓ HIGH POWER
- ✓ BUILT-IN TEMPERATURE CONTROL



Part No. 809234, 809235 UNITY WORK LIGHT LED

Voltage: 10-32 V DC, Consumption: 10 W, Theoretical lumen: 1520, Actual lumen: 931, IP-class: IP68, Connection: DT, Cable length: 500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Lenght: 52,11 mm, Depth: 26,13 mm, Height including bracket: 112,2 mm, Operating temperature: -30°C - +65°C, E-approved: ECE R23 (809234), No (809235), EMC-certificate: ECE R10



52,11 MM



ZERO WASTE LIGHT

The zero waste light gives you an optimized light spread where you need it the most.

2200 ACTUAL LUMENS

Comes with a revolutionary strong light output with up to 2200 actual lumen.

Use the QR code to check out the product.

52,02 MM



WORK LIGHTS



INNOVATIVE FILTERING FUNCTION

A new, innovative filtering function on the category page allows users to choose if they only want to see E-approved functions, LED colors, or ADR products, for example.



PRODUCT DESCRIPTION

0


PRODUCT SPECIFICATIONS

1

INSTALLATI



Use the QR code to check our website.

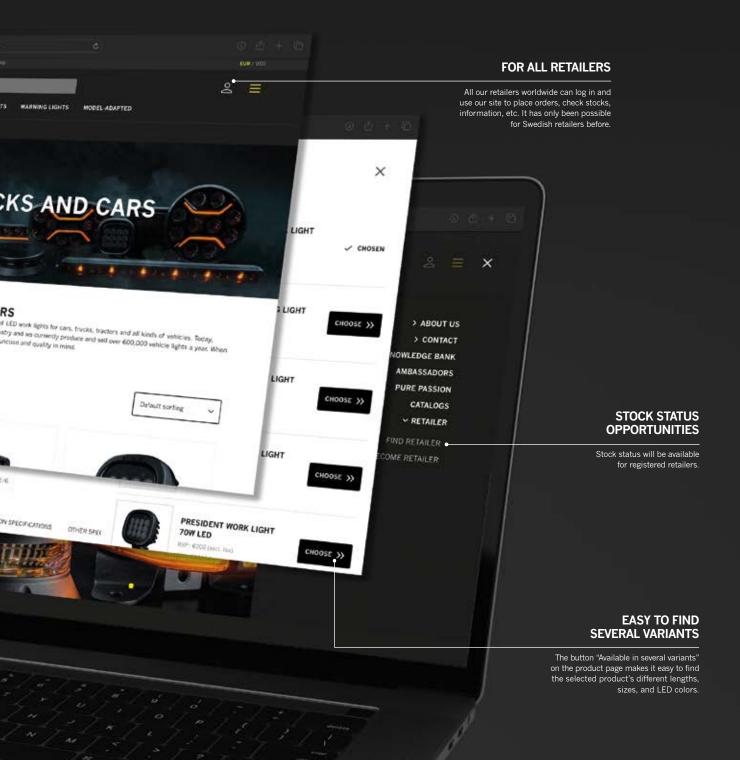

CONNECT WITH STRANDS ONLINE

Follow us where it happens. Check out our latest product news, inspiring photos, and exciting videos. Join our conversations and engage with passionate drivers all over the world. Don't forget to share your Strands photos, use #strandslightingdivision, and tag @strandslightingdivision to get highlighted. We look forward to getting to know you. See you online!

We at Strands offer ver warranty. Ne at Strands offer ver warranty.



in the the highest quality and always come with at

INSTAGRAM. Follow us at @strandslightingdivision for inspiration, exciting news, and participate in competitions.



AIIR

annets.

1111

北

FACEBOOK. Like Strands Lighting Division, engage in discussions and be the first to know about product news.



A MARKAT AND A MAR

The second secon

FEEL THE PASSION

YOUTUBE. Subscribe at Strands Lighting Division for innovative lighting in action and get detailed information about our products.



TIKTOK. Follow us at @strandslightingdivision for inspiring videos on trucks and other vehicles.



WEBSITE. Visit www.strandseurope.com for detailed information about our products

Do



STRANDS GROUP AB

+46 (0)320-450 450 | info@strands.se www.strands.se | www.strandseurope.com





With reservation for misprints and possible changes.

ISO 9001:2015 | ISO 14001:2015